

**USM-80600 & USM-80601  
PRESSURE RESERVOIRS**




**USM-80601 WITH AGITATOR**

Universal's USM-80600 and USM-80601 Pressure Reservoirs are used to increase the ink supply pressure to the USMR-20AF markers. Higher supply pressure allows more ink to flow into the atomizing air stream in a given time interval. The use of the Pressure Reservoir enables shorter duration triggering signals to be used and results in a faster reaction time for the marker. The Pressure Reservoirs are also recommended in applications requiring higher ink volume delivery. For most applications, tank pressure is set to 2-3 psi.


The USM-80600 and the USM-80601 Pressure Reservoirs are 64oz. capacity units which come complete with a pressure regulator, gauge and disposable liner.

The USM-80601 Pressure Reservoir also includes a pneumatically operated ink agitation system which keeps pigmented inks in uniform suspension during use.

*Disposable liners are available for both units.*

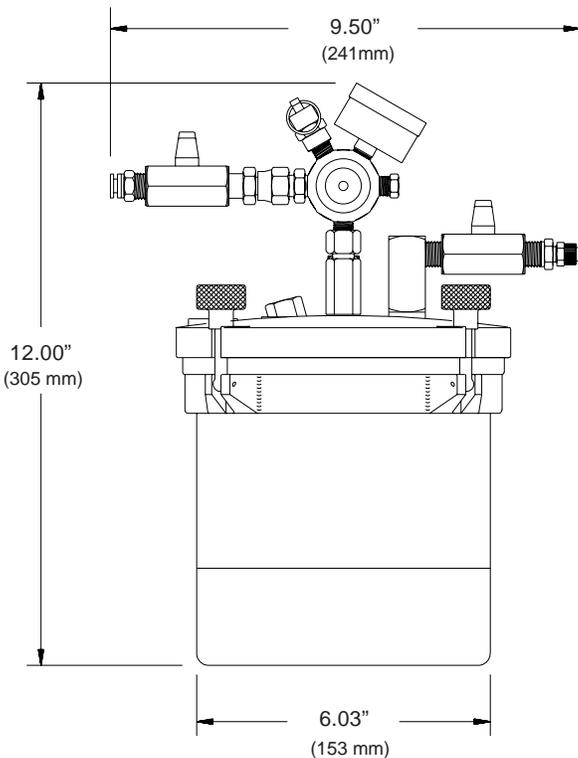

USM-80600 - 64 oz. PRESSURE RESERVOIR

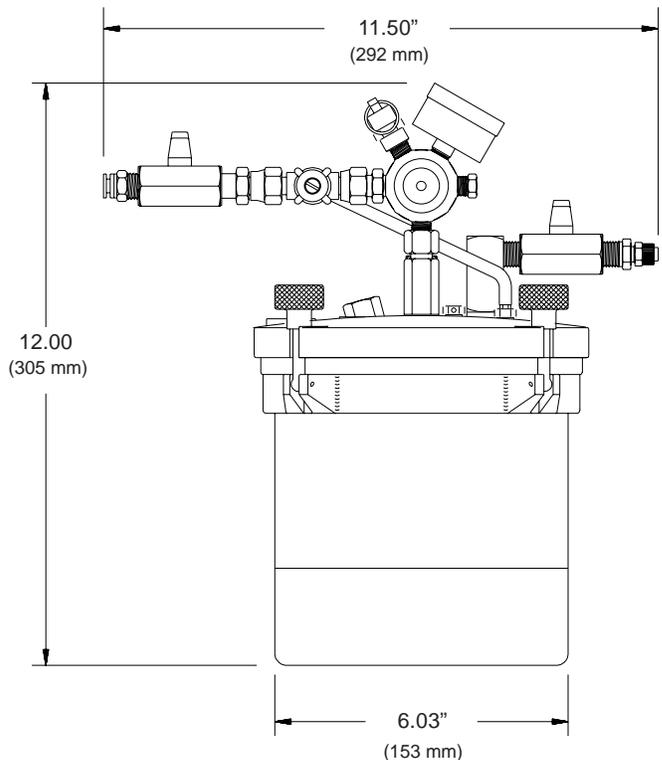

USM-80601 - 64 oz. PRESSURE RESERVOIR WITH AGITATOR

**Universal Stenciling & Marking Systems, Inc.**

P.O. Box 871 - St. Petersburg, FL 33731 - U.S.A.

Ph: (727) 894-3027 Fax: (727) 821-7944 E-Mail: sales@universal-marking.com Website: www.universal-marking.com